

GFM-C Series

6GFM-100 12V100Ah



GFM-C series VRLA battery uses latest AGM technology, high purity raw materials and many patented technologies that ensure its long floating and cycle life, it is applicable to less frequency of power failure, and shallow discharge of depth site. It is mainly used for indoor telecommunication base station.



Benefits

- Long life according to EUROBAT Classification
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Horizontal or Vertical installization


Applications

- Telecommunications
- Power system
- UPS
- Emergency power

Standards

- IEC 60896-21/22
- JIS C8704-1/2
- EUROBAT guide

Drawing

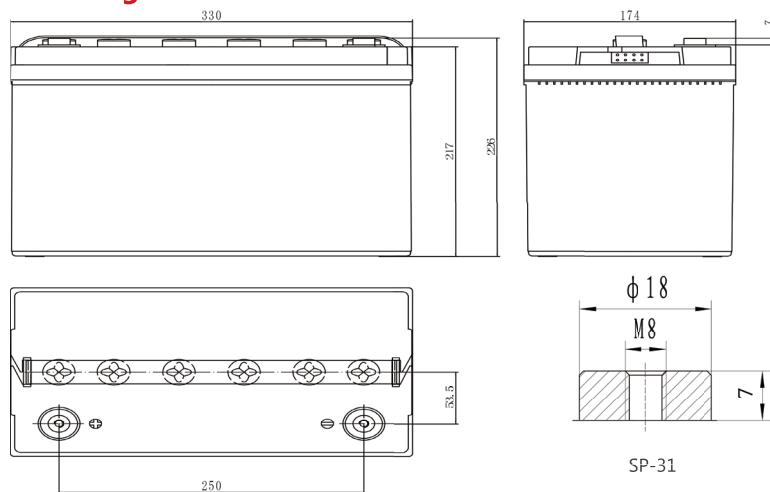

Specifications





Battery Model	6GFM-100			
Design Life (years, 25°C)	10			
Capacity (Ah, 25°C)	10HR (10.0A, 1.80V)	5HR (17.2A, 1.80V)	3HR (25.0A, 1.80V)	1HR (55.0A, 1.75V)
	100	86	75	55
Dimensions (mm)	Length	Width	Height	Total Height
	330	174	217	226
Approx. Weight (kg)	30.0			
Reference Internal Resistance (mΩ)	5 (fully charged @ 25°C)			
Maximum Discharge Current (A/1 Sec.)	800			
Self-Discharge (25°C)	≤ 2% per months			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40 (-3.5mV/°C/cell), max charge current: 25A		2.27 (-3.5mV/°C/cell)	
Short Circuit Current (A)	2400			

Discharge Data

Constant Current Discharge Data (25°C, A)																
End Voltage (V/cell)	min							h								
	5	10	15	20	30	40	50	1	1.5	2	3	4	5	6	8	10
1.60	310.0	221.6	180.3	154.4	110.5	84.0	68.4	63.2	45.9	37.0	27.4	22.0	18.6	16.18	12.84	10.57
1.65	288.5	209.9	172.2	148.1	106.4	81.8	66.7	60.5	44.7	36.1	26.7	21.5	18.2	15.91	12.62	10.43
1.70	274.2	199.4	161.7	140.9	103.1	79.5	64.4	57.7	43.6	35.2	26.1	21.0	17.8	15.56	12.44	10.29
1.75	254.8	187.6	153.0	132.4	98.35	76.4	61.9	55.0	42.3	34.6	25.5	20.7	17.5	15.29	12.23	10.14
1.80	239.1	178.3	145.7	126.5	94.10	71.4	58.2	51.9	41.4	33.9	25.0	20.3	17.2	15.01	12.07	10.00

Constant Power Discharge Data (25°C, W/cell)																
End Voltage (V/cell)	min							h								
	5	10	15	20	30	40	50	1	1.5	2	3	4	5	6	8	10
1.60	516.7	385.6	317.3	271.5	202.5	154.3	125.5	115.4	89.7	74.5	57.1	44.4	37.4	32.72	26.51	21.57
1.65	479.0	367.6	302.3	261.7	195.0	149.8	122.2	112.6	87.6	73.1	56.1	43.8	36.8	32.19	26.10	21.21
1.70	457.8	348.8	290.6	252.6	188.3	145.2	119.0	109.5	85.4	71.7	55.0	43.1	36.3	31.76	25.76	20.90
1.75	437.2	331.3	277.3	241.9	181.8	139.8	115.8	106.7	83.7	70.6	53.9	42.4	35.7	31.35	25.37	20.58
1.80	414.6	316.4	267.8	233.6	175.4	134.8	112.8	104.0	81.6	69.1	53.1	41.5	35.0	30.88	24.99	20.25

Performance Curve

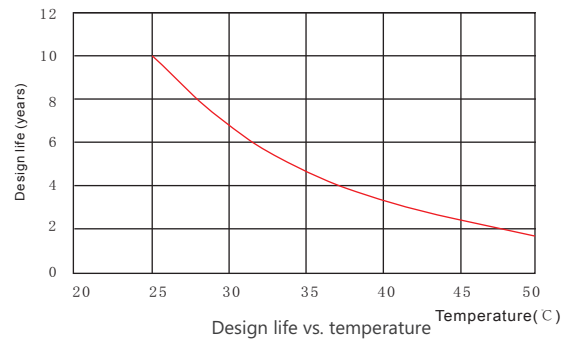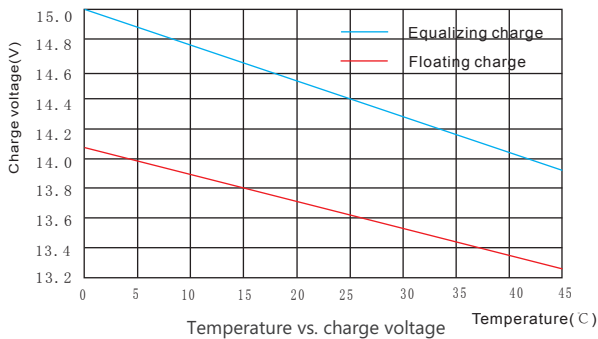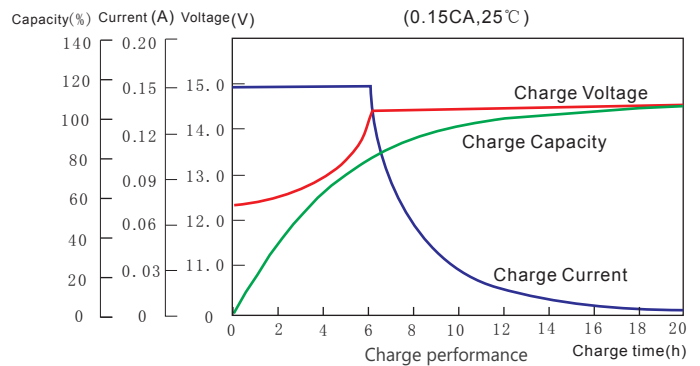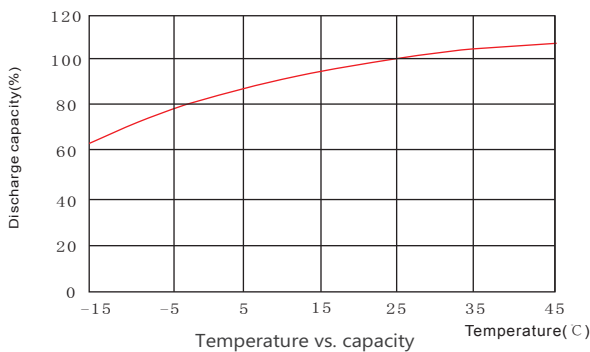

Sacred Sun Power Sources Co., Ltd.

No.1 Shengyang Road Qufu City, PRC
sales@sacredsun.cn

Sacred Sun Asia Pacific

No. 15, Yishun Industrial Street 1,
#01-17, WIN5, Singapore 768091
sales.asia@sacredsun.cn

Sacred Sun Europe SPRL

Schoenstraat 96-9140 Temse, Belgium
sales.eu@sacredsun.cn

Sacred Sun MEA FZE

S10122A1019 Jebel Ali, Dubai,
United Arab Emirates
sales.mea@sacredsun.cn

