

GFM-H Series

GFM-800H 2V800Ah

GFM-H series batteries use AGM technology with single large capacity and thick plate structure design. It has longer floating life and high floating consistency. Its modular and horizontal structure design ensures convenient installation and maintenance, saving space effectively. It is suitable for applications with high floating consistency requirements and data center.

Benefits

- Very long life according to EUROBAT Classification
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Horizontal installation method effectively prevent electrolyte stratification


Applications

- Telecommunications
- Power system
- UPS
- Electrical Power plants and substation
- Data center

Standards

- IEC 60896-21/22
- DL/T 637-1997
- EUROBAT guide

Drawing

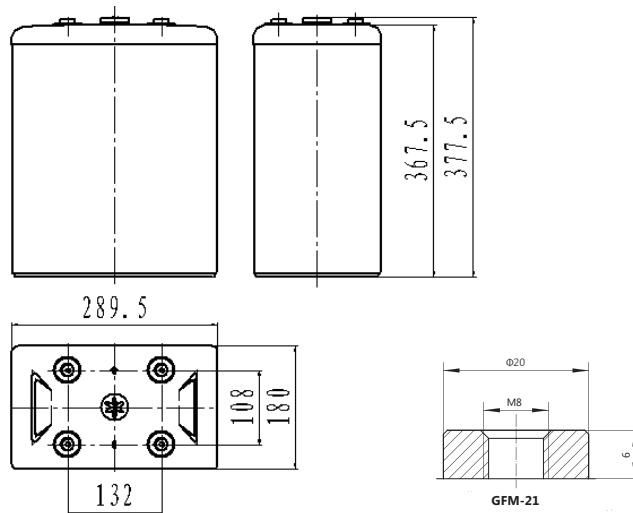

Specifications





Battery Model	GFM-800H			
Design Life (years, 25°C)	18			
Capacity (Ah, 25°C)	10HR (80.0A, 1.80V)	5HR (136A, 1.80V)	3HR (200A, 1.80V)	1HR(440A, 1.75V)
	800	680	600	440
Dimensions (mm)	Length	Width	Height	Total Height
	289.5	180	367.5	377.5
Approx. Weight (kg)	43.2			
Reference Internal Resistance (mΩ)	0.36 (fully charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	2800			
Self-Discharge (25°C)	≤ 1.5% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35 (-3.5mV/°C/cell), max charge current: 120A		2.25 (-3.5mV/°C/cell)	
Short Circuit Current (A)	7000			

Discharge Data

Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min			h										
	30	40	50	1	2	3	4	5	6	7	8	9	10	12
1.60	736	608	515	494	301	227	181	152	130	115	104	94	88	72
1.65	712	589	502	483	294	221	176	149	126	112	101	91	85	70
1.70	656	560	483	472	285	214	171	144	123	109	98	90	83	69
1.75	600	528	456	440	275	206	165	141	120	106	94	86	82	67
1.80	544	490	435	400	256	200	154	136	115	102	93	85	80	66

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min			h										
	30	40	50	1	2	3	4	5	6	7	8	9	10	12
1.60	1315	1091	934	892	557	419	338	278	245	219	198	184	166	142
1.65	1283	1069	920	880	547	413	333	275	242	216	195	181	165	141
1.70	1205	1024	896	872	534	403	325	270	240	211	192	178	163	138
1.75	1123	1000	864	826	522	390	314	262	232	208	187	173	160	136
1.80	1032	909	819	766	494	371	298	253	224	200	184	170	157	134

Performance Curve

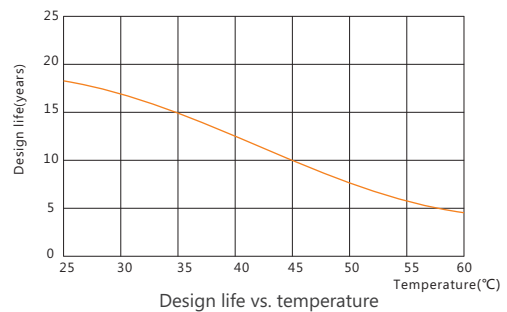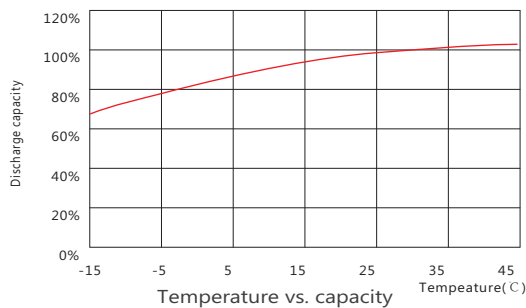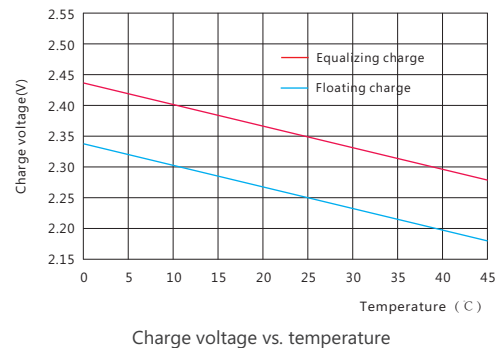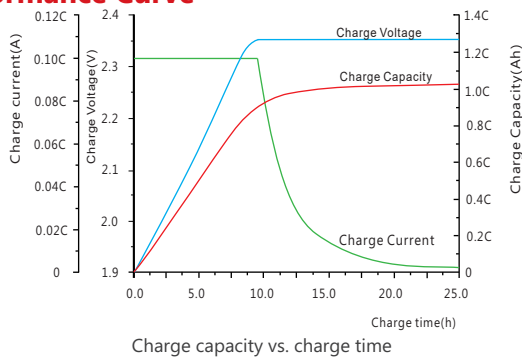

Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC
Tel: +86-537-4422313 Fax: +86-537-4411980
Email: sales@sacredsun.cn

Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong
Email: admin.hk@sacredsun.hk

Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555
Email: admin.sg@sacredsun.sg

Sacred Sun Europe SARRL

Add: ZAE Fontaine, 33210 Fargues, France
Email: admin.eu@sacredsun.eu

Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE
Email: admin.ae@sacredsun.ae

