

# GFMG Series

## GFMG-515 2V515Ah

GFMG VRLA large capacity high power battery uses AGM technology. It has wide & low structure design with low level of electrolyte stratification. GFMG has excellent high current and high power discharge performance. It is suitable for floating and cyclic applications.

### Benefits

- Long life according to EUROBAT Classification
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling


### Applications

- Telecommunications
- Emergency power
- UPS units
- Electrical Power plants and substation
- Transportation

### Standards

- IEC 60896-21/22
- BS 6290-4
- EUROBAT guide

### Drawing

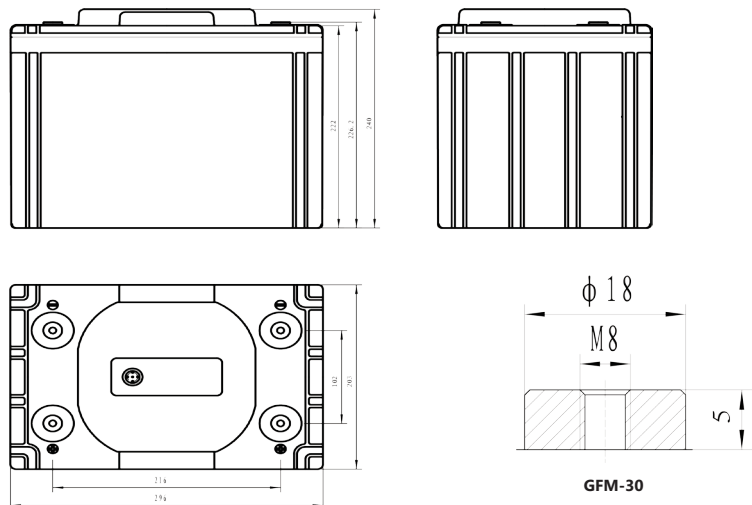

### Specifications


Battery Model	GFMG-515			
Design Life (years, 25°C)	12			
Capacity (Ah, 25°C)	10HR (51.5A, 1.80V)	5HR (91.2A, 1.80V)	3HR (136A, 1.80V)	1HR(309A, 1.75V)
	515	456	408	309
Dimensions (mm)	Length	Width	Height	Total Height
	296	203	222	240
Approx. Weight (kg)	34.7			
Reference Internal Resistance (mΩ)	0.38±15%( full charged @ 25°C,testing device:HIOKIBT3562)			
Maximum Discharge Current (A/3 Sec.)	2800			
Self-Discharge (25°C)	≤ 1% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35 (-3.5mV/°C/cell), max charge current:77.25A		2.25 (-3.5mV/°C/cell)	
Short Circuit Current (A)	5400			

## Discharge Data


Constant Current Discharge Data (25°C, A)														
End Voltage (V/cell)	min							h						
	5	10	15	20	30	40	50	1	1.5	2	3	5	8	10
1.60	1406	1069	871	738	567	459	384	329	250	201	144	94.6	65.4	53.3
1.65	1278	979	805	688	535	437	368	323	244	198	142	93.5	64.8	52.9
1.67	1224	940	776	665	520	427	361	319	241	196	141	93.0	64.6	52.8
1.70	1167	899	745	641	504	416	353	313	238	194	140	92.5	64.2	52.4
1.75	1021	828	701	611	487	405	345	309	234	190	138	91.3	63.6	52.1
1.80	896	766	662	582	469	391	334	297	227	186	136	90.2	62.9	51.5

Constant Power Discharge Data (25°C, W/cell)														
End Voltage (V/cell)	min							h						
	5	10	15	20	30	40	50	1	1.5	2	3	5	8	10
1.60	2049	1734	1439	1254	955	774	661	578	446	365	263	175	126	103
1.65	1882	1574	1319	1156	887	729	628	558	429	352	256	172	124	101
1.67	1779	1519	1277	1125	855	710	611	551	423	348	254	171	124	100
1.70	1661	1442	1226	1081	828	691	594	542	418	343	251	170	123	99.8
1.75	1488	1334	1143	1005	776	649	568	516	406	334	246	166	121	98.5
1.80	1368	1224	1047	926	728	613	547	493	394	325	241	164	120	97


## Performance Curve

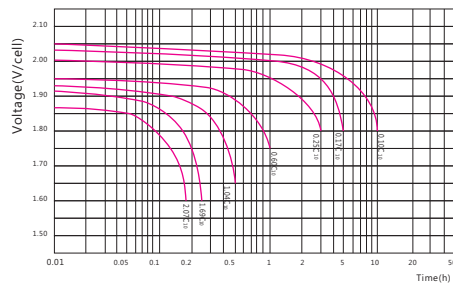


Discharge voltage vs. discharge time

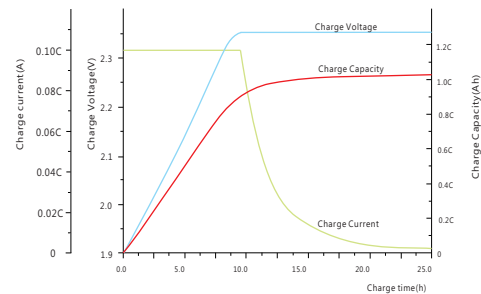

Charge capacity vs. charge time

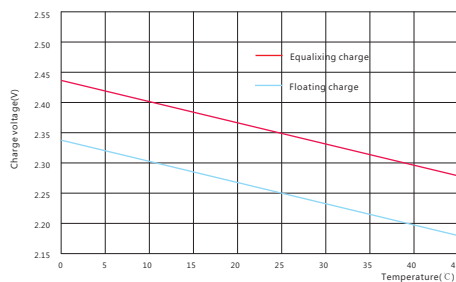

Charge capacity vs. temperature

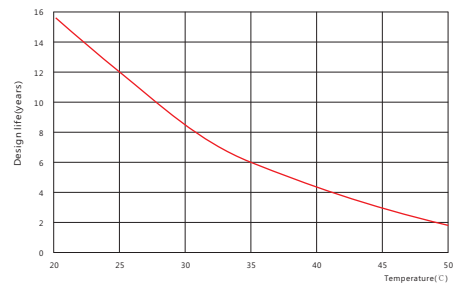

Design life vs. temperature

### Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC  
 Tel: +86-537-4422313 Fax: +86-537-4411980  
 Email: sales@sacredsun.cn

### Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong  
 Email: admin.hk@sacredsun.hk

### Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555  
 Email: admin.sg@sacredsun.sg

### Sacred Sun Europe SARRL

Add: ZAE Fontaine, 33210 Fargues, France  
 Email: admin.eu@sacredsun.eu

### Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE  
 Email: admin.ae@sacredsun.ae

