

# SAJ Series

## SAJ12-65 12V65Ah



SAJ series battery uses AGM and gel mixed technology. It has good cycle life and large current discharge performance. It is a cost effective product and can be widely used in different photovoltaic, lighting, power supply and control systems..

### Benefits

- General Purpose according to EUROBAT Classification
- Special AGM separator, adding gel electrolyte, shallow cycle life is long
- Maximum charge efficiency
- High gas recombination efficiency
- Low self-discharge rate
- Horizontal or Vertical installation
- Easy installation and handling


### Applications

- Solar (Wind) energy system
- Solar communication/station
- Mobile storage system

### Standards

- IEC 60896-21/22
- DIN 43539-T5
- EUROBAT guide

### Drawing

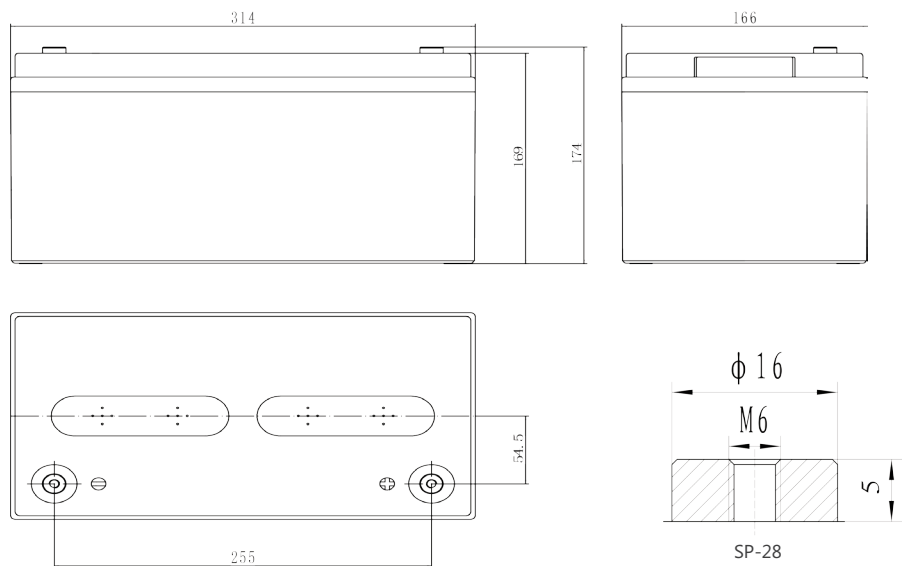

### Specifications





Battery Model	SAJ12-65			
Design Life (years, 25°C)	10			
Capacity (Ah, 25°C)	10HR (3.25A, 1.80V)	5HR (10.95A, 1.80V)	3HR (15.93A, 1.80V)	1HR (35.23A, 1.75V)
	65	54.75	47.79	35.23
Dimensions (mm)	Length	Width	Height	Total Height
	314	166	169	174
Approx. Weight (kg)	20.0			
Reference Internal Resistance (mΩ)	6.4±15% ( full charged @ 25°C, testing device:HIOKI BT3562)			
Maximum Discharge Current (A/5 Sec.)	780			
Self-Discharge (25°C)	≤ 1.5% per months			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40(-3.5mV/°C/cell), max charge current: 13A		2.27(-3.5mV/°C/cell)	
Short Circuit Current (A)	1850			

## Discharge Data

Constant Current Discharge Data (25°C, A)									
End Voltage (V/cell)	h								
	1	3	5	10	20	50	100	120	240
1.70	36.21	16.77	11.51	6.730	3.420	1.443	0.754	0.637	0.338
1.75	35.23	16.45	11.28	6.630	3.350	1.417	0.741	0.628	0.332
1.80	34.13	15.93	10.95	6.500	3.270	1.385	0.728	0.618	0.325
1.85	32.83	15.34	10.56	6.340	3.190	1.346	0.709	0.602	0.319
1.90	31.20	14.63	10.11	6.120	3.080	1.300	0.689	0.585	0.312

Constant Power Discharge Data (25°C, W/cell)									
End Voltage (V/cell)	h								
	1	3	5	10	20	50	100	120	240
1.70	65.50	29.80	20.95	12.31	6.370	3.200	1.700	1.430	0.730
1.75	63.50	29.69	20.44	12.10	6.270	3.150	1.680	1.420	0.720
1.80	61.62	29.35	19.92	11.88	6.180	3.100	1.650	1.410	0.710
1.85	59.75	29.01	19.43	11.58	6.020	3.050	1.620	1.400	0.710
1.90	57.95	28.78	18.94	11.36	5.880	3.000	1.590	1.380	0.700

## Performance Curve

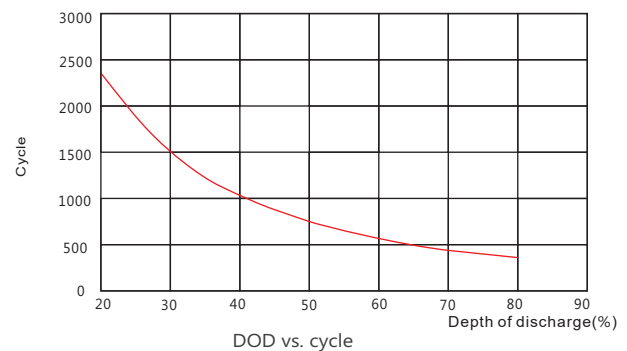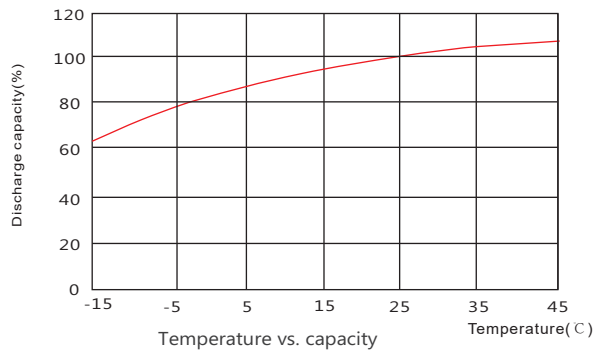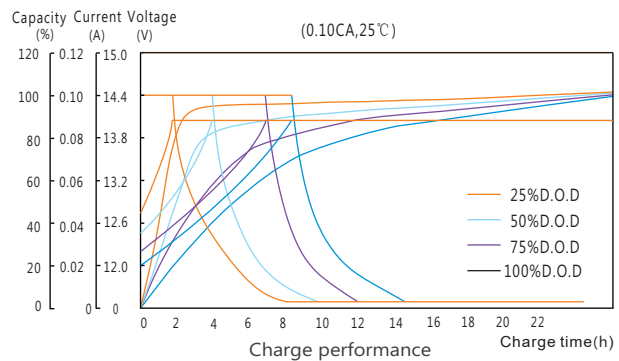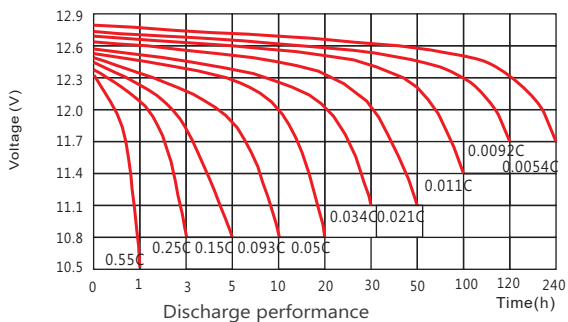

### Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC  
Tel: +86-537-4422313 Fax: +86-537-4411980  
Email: sales@sacredsun.cn

### Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong  
Email: admin.hk@sacredsun.hk

### Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555  
Email: admin.sg@sacredsun.sg

### Sacred Sun Europe SARL

Add: ZAE Fontaine, 33210 Fargues, France  
Email: admin.eu@sacredsun.eu

### Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE  
Email: admin.ae@sacredsun.ae