

# DCS Series

## DCS12-50 12V50Ah



DCS series deep cycle battery is made of special high-tin corrosion-resistant alloy, It has optimized positive grid structure design and special negative active material improving charge acceptance ability and reducing negative plate sulphation. It is optimal battery for a wide range of household energy storage systems and suitable for partial state of charge (PSOC) applications.

### Benefits

- Very long life according to EUROBAT Classification
- More than 3000 cycles at 70% DOD
- Special negative active material formula, improve the charge acceptance ability, reduce the negative plate sulphation, more suitable for the partial state of charge (PSOC) application
- Modular design and horizontal installation, compact structure, saving the installation area and space, easy installation, convenient maintenance


### Applications

- Household energy storage system
- Solar and wind energy system
- Emergency system
- Other cycling systems

### Standards

- IEC 60896-21/22
- IEC61427
- EUROBAT guide

### Drawing

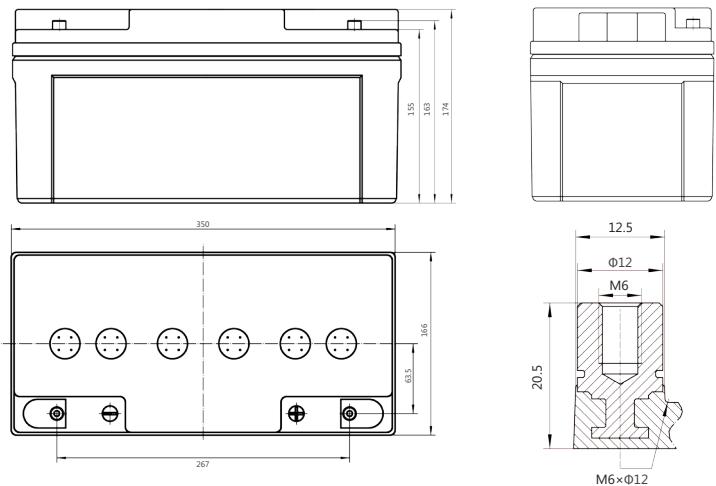

### Specifications


Battery Model	DCS12-50			
Design Life (years, 25°C)	15			
Capacity (Ah, 25°C)	10HR (5.0A, 1.80V)	5HR (8.5A, 1.80V)	3HR (12.5A, 1.80V)	100HR(0.627A, 1.80V)
	50.0	42.5	37.5	62.7
Dimensions (mm)	Length	Width	Height	Total Height
	350	166	174	174
Approx. Weight (kg)	25.5			
Reference Internal Resistance (mΩ)	4.8±15% ( full charged @ 25 °C,testing device:HIOKI BT3562)			
Short Circuit Current (A)	1500			
Self-Discharge (25°C)	≤ 1% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40 (-3.5mV/°C/cell), max charge current: 20A		2.25 (-3.5mV/°C/cell)	

## Discharge Data


Constant Current Discharge Data (25°C, A)											
End Voltage (V/cell)	h										
	1	2	3	5	8	10	20	50	100	120	240
1.70	28.3	20.8	13.6	9.2	7.02	5.30	3.14	1.26	0.651	0.561	0.297
1.75	27.5	20.2	13.0	9.0	6.84	5.24	3.09	1.24	0.639	0.555	0.295
1.80	26.9	19.6	12.5	8.5	6.50	5.00	2.96	1.19	0.627	0.545	0.291
1.85	26.0	18.7	12.0	8.0	6.00	4.80	2.80	1.14	0.601	0.528	0.281
1.90	24.0	17.2	10.9	7.2	5.44	4.36	2.55	1.04	0.563	0.491	0.258
1.95	21.6	15.2	9.3	6.2	4.66	3.75	2.04	0.83	0.452	0.402	0.215

Constant Power Discharge Data (25°C, W/cell)											
End Voltage (V/cell)	h										
	1	2	3	5	8	10	20	50	100	120	240
1.70	54.7	39.4	28.5	20.3	14.0	10.7	5.82	2.37	1.26	1.10	0.587
1.75	54.0	38.9	28.1	20.0	13.8	10.6	5.76	2.34	1.24	1.09	0.583
1.80	53.1	38.1	27.5	19.6	13.5	10.4	5.66	2.29	1.22	1.07	0.574
1.85	51.9	37.0	26.8	19.1	12.9	10.0	5.48	2.23	1.17	1.04	0.556
1.90	50.0	35.2	25.0	17.8	12.0	8.98	5.02	2.04	1.11	0.969	0.511
1.95	45.6	31.6	21.9	15.1	10.5	7.96	4.16	1.68	0.926	0.826	0.449


## Performance Curve

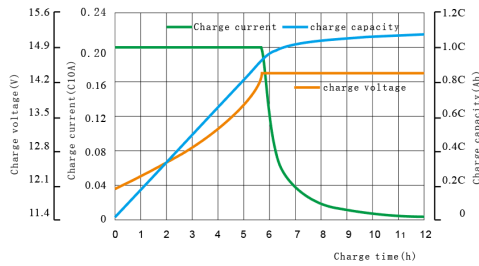


Charging characteristic

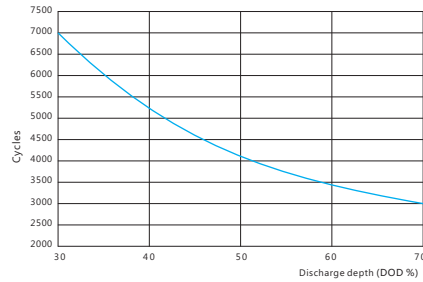

Cycle life vs. discharge depth

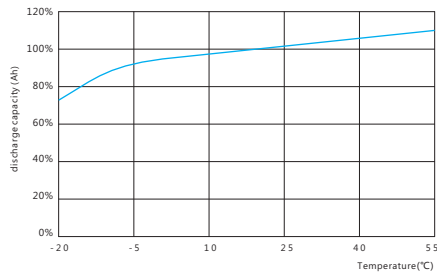

Discharge capacity vs. temperature

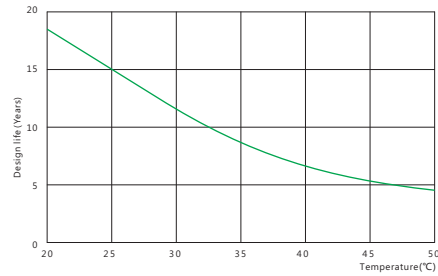

Design life vs. temperature

### Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC  
Tel: +86-537-4422313 Fax: +86-537-4411980  
Email: sales@sacredsun.cn

### Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong  
Email: admin.hk@sacredsun.hk

### Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555  
Email: admin.sg@sacredsun.sg

### Sacred Sun Europe SARL

Add: ZAE Fontaine, 33210 Fargues, France  
Email: admin.eu@sacredsun.eu

### Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE  
Email: admin.ae@sacredsun.ae

