

UPS-FTA Series

UPS12-700FTA 12V200Ah

Sacred Sun front terminal batteries have been designed specifically for applications which demand the highest levels of security and reliability. The monoblocs have excellent high power discharge, compact design and standard footprint for 23' cabinets. Thick Pb-Ca-Sn alloy grids are designed to resist corrosion and prolong service life.

Benefits

- Long life according to EUROBAT Classification
- High discharge performance
- High gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling
- Centralized venting system


Applications

- Data center
- Power system
- UPS
- Emergency power
- Telecommunications

Standards

- IEC 60896-21/22
- BS 6290-4
- EUROBAT guide

Drawing

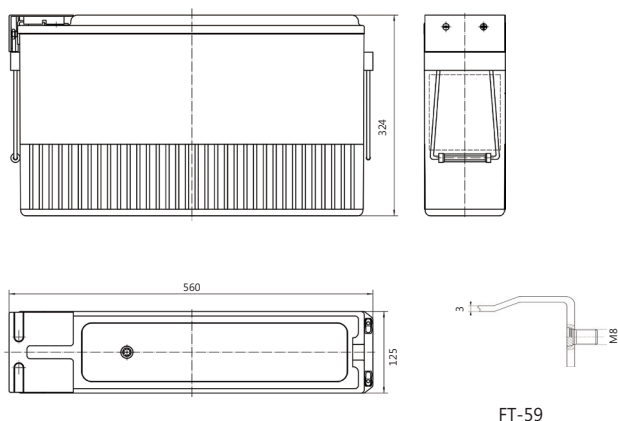

Specifications


Battery Model	UPS12-700FTA			
Design Life (years, 25°C)	12			
Capacity (25°C)	10min (1.60V)	15min (1.67V)	1HR (122.7A, 1.75V)	10HR(20.0A, 1.80V)
	875.7W	700W	122.7Ah	200Ah
Dimensions (mm)	Length	Width	Height	Total Height
	560	125	324	324
Approx. Weight (kg)	60.2			
Reference Internal Resistance (mΩ)	2.5 ±15% (fully charged @ 25°C,testing device:HIOKIBT3562)			
Maximum Discharge Current (A/3 Sec.)	1520			
Self-Discharge (25°C)	≤2% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	14.1(-3.5mV/°C/cell), max charge current: 40A		13.5 (-3.5mV/°C/cell)	
Short Circuit Current (A)	4150			

Discharge Data


Constant Power Discharge Data (25°C, W/cell)													
End Voltage (V/cell)	min					h							
	10	15	20	30	45	1	1.5	2	3	4	5	6	10
1.60	875.7	727	615	457.6	347	275.4	202.5	165	113	86	75.5	64.9	42.9
1.65	859.1	703	590.1	435.2	339.7	259.1	199.8	160	108	84	74.2	64	42.1
1.67	837	700	583	421	338.1	252	199.3	156	106	82.3	72.9	63	41.6
1.70	798.8	669	571	406.7	336	244.2	198.6	152	104	81.4	71.8	62.2	41.1
1.75	754.2	630	544	392.6	330.8	234	196.5	150	102	80.5	71.1	61.8	40.8
1.80	718.4	606	497	379	307	228.1	193	148	101	78.9	70.3	61	40.2

Constant Current Discharge Data (25°C, A)													
End Voltage (V/cell)	min					h							
	10	15	20	30	45	1	1.5	2	3	4	5	6	10
1.60	448	356	303.9	228	171.6	127	99.8	81.5	55.5	42.9	36.7	32	20.9
1.65	433	347	290	225	167	125.1	98.2	78.2	53.6	42	36.4	31.6	20.7
1.67	427	344	286	223	166	124.4	97.5	76.4	52.5	41.1	36	31.3	20.5
1.70	415	329	280	221	165	123.5	96.9	74.5	51.3	40.5	34.7	30.9	20.4
1.75	383	310	268	216	162	122.7	96.2	73.8	50.5	40	34.4	30.5	20.2
1.80	360	297	245	200	150	115.8	95.1	72.2	50	39.3	34	30.4	20


Performance Curve

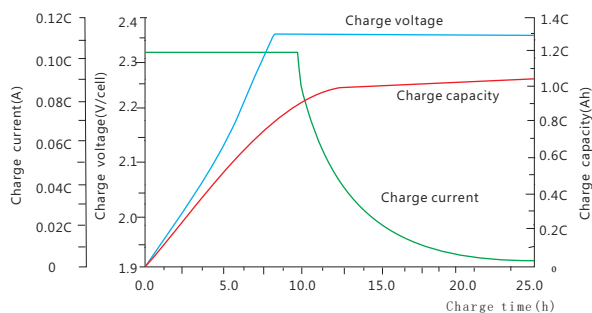


Charge performance

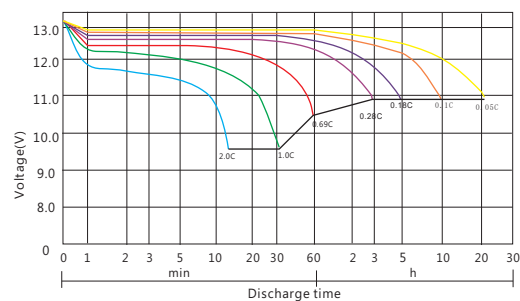

Discharge voltage vs. discharge time

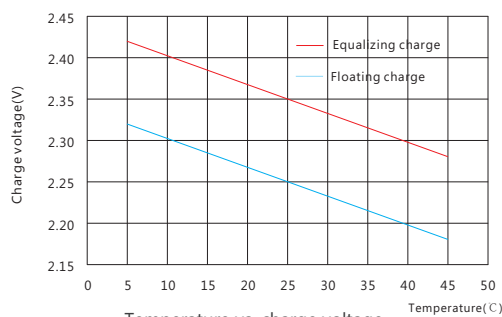

Temperature vs. charge voltage

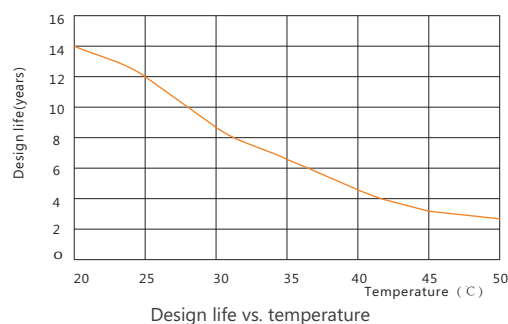

Design life vs. temperature

Sacred Sun Power Sources Co., Ltd.

Add: No.1 Shengyang Road, Qufu 273100 PRC
 Tel: +86-537-4422313 Fax: +86-537-4411980
 Email: sales@sacredsunsun.cn

Sacred Sun Hong Kong Co., Limited

Add: RM 19C Lockhart CTR 301-307 Lockhart RD Wan Chai, Hong Kong
 Email: admin.hk@sacredsunsun.hk

Sacred Sun Asia Pacific Pte Ltd.

Add: 1 Ubi View, #04-12, Focus One, Singapore 408555
 Email: admin.sg@sacredsunsun.sg

Sacred Sun Europe SARL

Add: ZAE Fontaine, 33210 Fargues, France
 Email: admin.eu@sacredsunsun.eu

Sacred Sun MEA FZE

Add: No. 311 office, Building LOB 14, JAFZA, Dubai, UAE
 Email: admin.ae@sacredsunsun.ae

