

SmartPower 48200

High energy, 11U rack-mount lithium-ion battery system

SmartPower 48200 has been designed to provide power backup for remote or outside telecom plants like Access Terminals, Base Transceiver Stations, Base Station Controllers. They are also suitable to provide bulk power in Central Offices.

This "all included" stand-alone battery system now provides the benefits of Sacred Sun Li-ion technology in a qualified industrial design: SmartPower provides maintenance-free energy storage in a reduced volume, combining high operational reliability with outstanding life time under the most difficult environmental conditions.

Features

- Integrated 48 V system containing 9.6 kWh of energy
- Parallel operation, for scalability
- Energy density of 112 Wh/dm³, surpassing most advanced VRLA designs
- State of charge and state of health indication
- Built-in battery control for efficient operation
- Redundant safety
- Comprehensive communication
- Compatible with standard telecom rectifiers

Benefits

- Increased energy in given space
- Easy installation and upscaling
- High operational reliability
- Optimized supervision strategy through remote control/diagnostic
- Very long life time
- Preventive but not premature replacement at end of life



SmartPower 48200

Nominal Characteristics

Nominal Voltage (V)	48
Typical Capacity (Ah)	200
Typical Energy (Wh)	9600
Volumetric energy density (Wh/dm ³)	112
Gravimetric energy density (Wh/kg)	87

Mechanical Characteristics

Width (mm)	442(19")
Height (mm)	484(11U)
Depth (mm)	400
Weight (Kg)	110

Electrical Characteristics

Voltage Window	40.5 to 54
Charge voltage range (V)	53.25 to 54
Max. permanent discharge current (A)	100
Recharge time (h)	6
Faradic charge efficiency (+20°C)	99%

Operation Conditions

Cycle life (80% dod; +25°C)	3500 cycles
Operating temperature	- 20°C~+60°C
Storage temperature	- 20°C~+40°C

Last modified: December, 2014

ShanDong Sacred Sun Power Sources Co., Ltd

Add: No1, Shengyang Road, Qufu, P.R.C Tel: +86-537-438666-6119



Functional characteristics

LiFePO₄ Li-ion technology

SmartPower 48200 contains cells with advanced LiFePO₄ lithium-ion technology:

- Outstanding calendar and cycle life and reliability at high temperature
- Industrial production for high tech-applications such as space & defense, electric vehicles, robots, etc.
- Stable internal resistance over entire life
- High reliability by using high capacity cells: avoids massive cell paralleling within a 48 V module

Control for efficient operation

- On/Off switch
- Active/Sleep (storage, prolonged outage) /Alarm modes
- Charge/Discharge management
- Cell balancing

Mechanical & electrical interface

- 19 inches, 11U rack-mount design
- Industrial standard terminals on front panel

Communication

The battery system informs the user and the application, via visual communication by LEDs on front panel. In the same time, the supervision can be done through RS232.

The data available are:

- State of charge, state of health
- Alarm level (minor, major); alarm reason
- Operating conditions (voltage, temperature, identification number)



Safety

Redundant safety design to cope with component failure or abusive conditions:

- At battery system level: electronic board, reversible protection, separate power switches in charge and discharge circuit
- At cell pack level: electronic board, individual cell voltage monitoring
- At cell level: shutdown-effect separator, mechanical vent & current breaker

Sustainable design

The whole life cycle of SmartPower 48200 is considered closely during all phases of development, from manufacturing to industrial operations and recycling. For its advanced design, SmartPower is friendly to environment and consumes less energy compared with the VRLA Batteries which have same capacity.

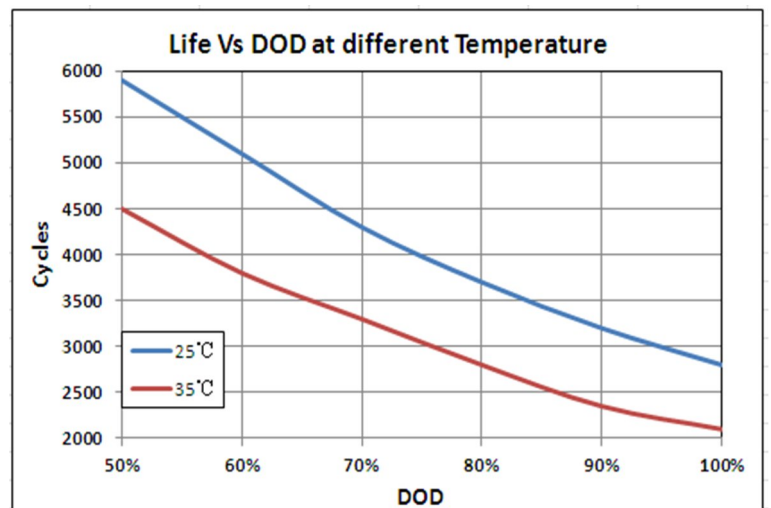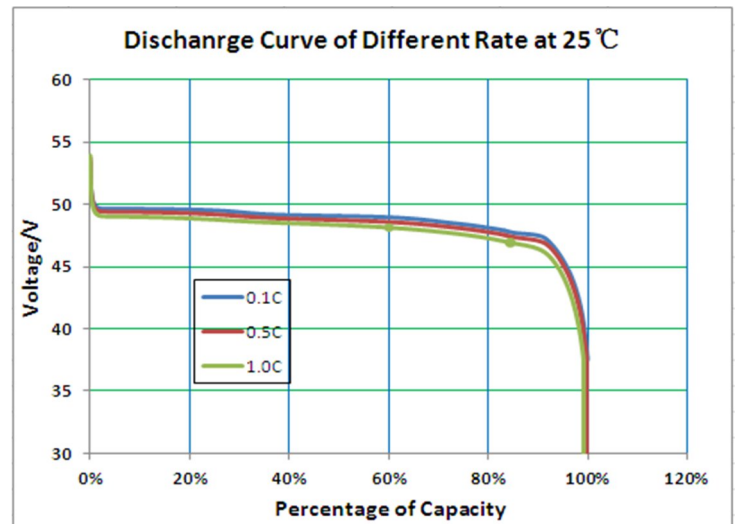

Industrial vision

SmartPower has been developed and qualified to suit the demanding requirements of performance and operational reliability telecom OEM's and operators, who are manufacturing or operating high-value, industrial equipment.

SmartPower is made of proven components (cells, electronics) which are also employed in demanding space, automotive and other civil applications. Cell manufacturing is carried out on established industrial production lines. Manufacturing plants comply with the legislation in force in each country and with international quality standards (ISO 9001 and 14001).

Last modified: December, 2014

ShanDong Sacred Sun Power Sources Co., Ltd

Add: No1, Shengyang Road, Qufu, P.R.C Tel: +86-537-438666-6119